

센서

변위 · 계측센서

머신비전

마킹시스템

광학 · 측정기기

기타

컬러센서

- colorSENSOR CF0100
- colorSENSOR LT-2-DU
- colorSENSOR LT-3-LU
- colorSENSOR OT-3-MA
- colorSENSOR OT-3-GL
- colorSENSOR OT-3-HR
- colorSENSOR OT-3-LD
- colorSENSOR OT-3-LU
- colorCONTROL MFA
- colorSENSOR Fiber optics
- colorSENSOR KL-xx/xx
- colorSENSOR/CONTROL Accessories
- colorCONTROL ACS7000
- colorCONTROL ACS1
- colorCONTROL ACS2
- colorCONTROL ACS3
- colorCONTROL ACS Software
- colorCONTROL ACS Accessories

사양

| colorCONTROL ACS 액세서리 | | |
|-----------------------|---|--|
| 제품 번호 | 상세 | 적용 |
| 11234274 | reflectance standard 1.25" Fluorilon | colorSENSOR and colorCONTROL |
| 11234222 | CAB-M9-4P-co-straight; 2m-PUR; open ends | colorCONTROL ACS7000 (power) |
| 11234225 | CAB-M9-4P-co-straight; 5m-PUR; open ends | colorCONTROL ACS7000 (power) |
| 11234091 | CAB-M9-8P-co-straight; 2m-PUR; open ends | colorCONTROL ACS7000 (digital I/O, Sync.) |
| 11234099 | CAB-M9-8P-co-straight; 5m-PUR; open ends | colorCONTROL ACS7000 (digital I/O, Sync.) |
| 11234223 | CAB-M9-7P-co-straight; 2m-PUR; open ends | colorCONTROL ACS7000 (colour Out) |
| 11234226 | CAB-M9-7P-co-straight; 5m-PUR; open ends | colorCONTROL ACS7000 (colour Out) |
| 11294232 | CAB-RJ45-Eth; 2m-PVC-Cat5e; RJ45-Eth | colorCONTROL ACS7000 (Ether-net/-CAT) |
| 11293257 | CAB-RJ45-Eth; 5m-PVC-Cat5e; RJ45-Eth | colorCONTROL ACS7000 (Ether-net/-CAT) |
| 11294277 | CAB-RJ45-Eth-Cross; 3m-PVC-Cat5e; RJ45-Eth | colorCONTROL ACS7000 (Ether-net/-CAT) |
| 11293258 | CAB-RJ45-Eth-Cross; 5m-PVC-Cat5e; RJ45-Eth | colorCONTROL ACS7000 (Ether-net/-CAT) |
| 11234224 | CAB-M9-5P-co-straight; 2m-PVC-RS422; open ends | colorCONTROL ACS7000 (RS422) |
| 11234227 | CAB-M9-5P-co-straight; 5m-PVC-RS422; open ends | colorCONTROL ACS7000 (RS422) |
| 11234230 | CAB-M9-5P-co-straight; 2m-PVC-RS422; Sub-D-15P-co-straight | colorCONTROL ACS7000 (IF2008) |
| 11234231 | CAB-M9-5P-co-straight; 5m-PVC-RS422; Sub-D-15P-co-straight | colorCONTROL ACS7000 (IF2008) |
| 2213017 | IF2008 Interface card RS422 / PCI-card | colorCONTROL ACS7000 (RS422/PC) |
| 10824338 | FCS-ACS1-30/0 adapter tactile | FCS-X-ACS1-30/0-50-XXXX |
| 10824424 | FCS-ACS adapter TT-TR | all ACS sensor heads (조connection illumination into receiving fibres) |
| 10824414 | FCS-ACS3-200 레일 마운팅 | FCS-X-ACS3 |
| 10824423 | FCS-ACS3 mounting adapter 50mm | FCS-ACS3-200 mounting rail |
| 10824422 | FCS-ACS3 150mm | FCS-ACS3-200 mounting rail |
| 2420065 | PS2030 power supply 24V/24W/ 1A; 2m-PVC; Terminal-2P-co-fm-straight | CAB-M9-4P-co-straight; Xm-PUR; open ends (Power) |


컬러센서

핀 배열

CAB-M9-5P-co-straight; Xm-PVC-RS422; open ends

제품 번호: 11234224; 11234227

RS422 연결 케이블
(최대 길이 5m, 외장 PVC)

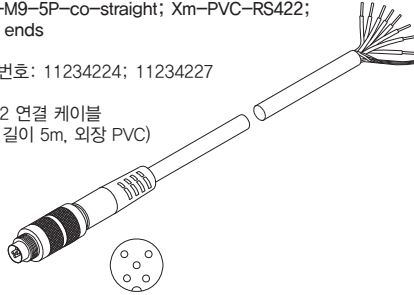


| 핀 | 색상 | ACS7000 |
|---|-----|-----------------------|
| 1 | 흰색 | TX |
| 2 | 갈색 | /TX |
| 3 | 초록색 | /RX |
| 4 | 노란색 | RX |
| 5 | 회색 | GND RS422 DC-isolated |

CAB-M9-8P-co-straight; Xm-PUR; open ends

제품 번호: 11234091; 11234098

전원/PLC 또는 디지털 I/O 연결 케이블
(최대 길이 10m, 외장 PUR)

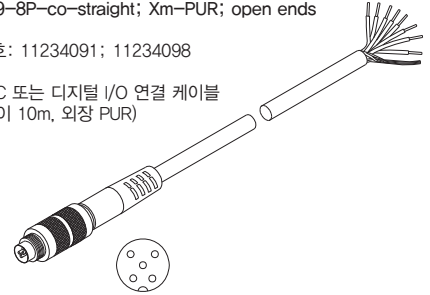

| Pin | 색상 | ACS7000 |
|-----|-----|---------------|
| 1 | 흰색 | Error |
| 2 | 갈색 | GND Error |
| 3 | 초록색 | Sync. OUT |
| 4 | 노란색 | GND Sync. OUT |
| 5 | 회색 | Sync. IN |
| 6 | 분홍색 | GND Sync. IN |
| 7 | 파란색 | LLL / HLL |
| 8 | 빨간색 | LLL / HLL |

센서

변위 · 계측센서

머신비전

마킹시스템

광학 · 측정기기

기타

변위 · 계측센서

레이저변위센서

장거리레이저변위센서

2D · 3D 스캐너

마이크로미터

공조점변위센서

분광간섭변위센서

정전용량변위센서

와전류변위센서

마그네틱변위센서

와이어변위센서

접촉식변위센서

디스플레이유닛

데이터처리

온도센서


열화상카메라

컬러센서

CAB-M9-7P-co-straight; Xm-PUR; open ends

제품 번호: 11234223; 11234226

연결 케이블 색상 OUT
(최대 길이 10m, 외장 PUR)

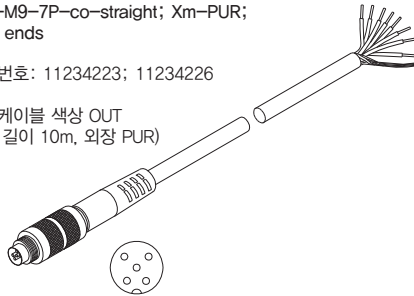


| 핀 | 색상 | ACS7000 |
|---|-----|---------|
| 1 | 흰색 | OUT 0 |
| 2 | 갈색 | OUT 1 |
| 3 | 초록색 | OUT 2 |
| 4 | 노란색 | OUT 3 |
| 5 | 회색 | GND |
| 6 | 분홍색 | n.c. |
| 7 | 파란색 | n.c. |

CAB-M9-4P-co-straight; Xm-PUR; open ends

제품 번호: 11234222; 11234225

전원 연결 케이블
(최대 길이 10m, 외장 PUR)

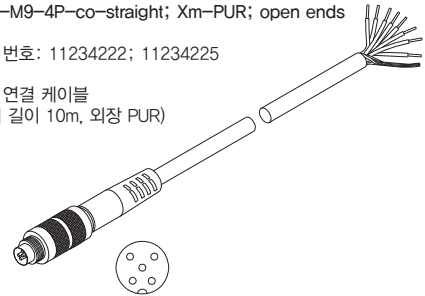

| 핀 | 색상 | ACS7000 |
|---|-----|----------------|
| 1 | 흰색 | n.c. |
| 2 | 갈색 | +24V DC (±15%) |
| 3 | 검정색 | n.c. |
| 4 | 파란색 | GND (0V) |