

사양

컬러센서

센서

변위 · 계측센서

머신비전

마킹시스템

광학 · 측정기기

기타

컬러센서

- colorSENSOR CFO100
- colorSENSOR LT-2-DU
- colorSENSOR LT-3-LU
- colorSENSOR OT-3-MA
- colorSENSOR OT-3-GL
- colorSENSOR OT-3-HR
- colorSENSOR OT-3-LD
- colorSENSOR OT-3-LU
- colorCONTROL MFA
- colorSENSOR Fiber optics
- colorSENSOR KL-xx/xx
- colorSENSOR/CONTROL Accessories
- colorCONTROL ACS7000
- colorCONTROL ACS1
- colorCONTROL ACS2
- colorCONTROL ACS3

- colorCONTROL ACS Software
- colorCONTROL ACS Accessories

colorCONTROL ACS 액세서리		
제품 번호	상세	적용
11234274	reflectance standard 1.25" Fluorilon	colorSENSOR and colorCONTROL
11234222	CAB-M9-4P-co-straight; 2m-PUR; open ends	colorCONTROL ACS7000 (power)
11234225	CAB-M9-4P-co-straight; 5m-PUR; open ends	colorCONTROL ACS7000 (power)
11234091	CAB-M9-8P-co-straight; 2m-PUR; open ends	colorCONTROL ACS7000 (digital I/O, Sync.)
11234099	CAB-M9-8P-co-straight; 5m-PUR; open ends	colorCONTROL ACS7000 (digital I/O, Sync.)
11234223	CAB-M9-7P-co-straight; 2m-PUR; open ends	colorCONTROL ACS7000 (colour Out)
11234226	CAB-M9-7P-co-straight; 5m-PUR; open ends	colorCONTROL ACS7000 (colour Out)
11294232	CAB-RJ45-Eth; 2m-PVC-Cat5e; RJ45-Eth	colorCONTROL ACS7000 (Ether-net/-CAT)
11293257	CAB-RJ45-Eth; 5m-PVC-Cat5e; RJ45-Eth	colorCONTROL ACS7000 (Ether-net/-CAT)
11294277	CAB-RJ45-Eth-Cross; 3m-PVC-Cat5e; RJ45-Eth	colorCONTROL ACS7000 (Ether-net/-CAT)
11293258	CAB-RJ45-Eth-Cross; 5m-PVC-Cat5e; RJ45-Eth	colorCONTROL ACS7000 (Ether-net/-CAT)
11234224	CAB-M9-5P-co-straight; 2m-PVC-RS422; open ends	colorCONTROL ACS7000 (RS422)
11234227	CAB-M9-5P-co-straight; 5m-PVC-RS422; open ends	colorCONTROL ACS7000 (RS422)
11234230	CAB-M9-5P-co-straight; 2m-PVC-RS422; Sub-D-15P-co-straight	colorCONTROL ACS7000 (IF2008)
11234231	CAB-M9-5P-co-straight; 5m-PVC-RS422; Sub-D-15P-co-straight	colorCONTROL ACS7000 (IF2008)
2213017	IF2008 Interface card RS422 / PCI-card	colorCONTROL ACS7000 (RS422/PC)
10824338	FCS-ACS1-30/0 adapter tactile	FCS-X-ACS1-30/0-50-XXXX
10824424	FCS-ACS adapter TT-TR	all ACS sensor heads (조connection illumination into receiving fibres)
10824414	FCS-ACS3-200 레일 마운팅	FCS-X-ACS3
10824423	FCS-ACS3 mounting adapter 50mm	FCS-ACS3-200 mounting rail
10824422	FCS-ACS3 150mm	FCS-ACS3-200 mounting rail
2420065	PS2030 power supply 24V/24W/ 1A; 2m-PVC; Terminal-2P-co-fm-straight	CAB-M9-4P-co-straight; X1m-PUR; open ends (Power)

핀 배열

컬러센서

CAB-M9-5P-co-straight; Xm-PVC-RS422; open ends

제품 번호: 11234224; 11234227

RS422 연결 케이블
(최대 길이 5m, 외장 PVC)



핀	색상	ACS7000
1	흰색	TX
2	갈색	/TX
3	초록색	/RX
4	노란색	RX
5	회색	GND RS422 DC-isolated

CAB-M9-8P-co-straight; Xm-PUR; open ends

제품 번호: 11234091; 11234098

전원/PLC 또는 디지털 I/O 연결 케이블
(최대 길이 10m, 외장 PUR)




Pin	색상	ACS7000
1	흰색	Error
2	갈색	GND Error
3	초록색	Sync. OUT
4	노란색	GND Sync. OUT
5	회색	Sync. IN
6	분홍색	GND Sync. IN
7	파란색	LLL / HLL
8	빨간색	LLL / HLL

CAB-M9-7P-co-straight; Xm-PUR; open ends

제품 번호: 11234223; 11234226

연결 케이블 색상 OUT
(최대 길이 10m, 외장 PUR)

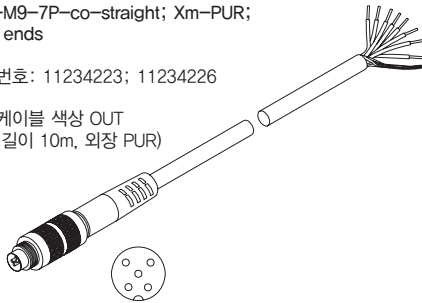


핀	색상	ACS7000
1	흰색	OUT 0
2	갈색	OUT 1
3	초록색	OUT 2
4	노란색	OUT 3
5	회색	GND
6	분홍색	n.c.
7	파란색	n.c.

CAB-M9-4P-co-straight; Xm-PUR; open ends

제품 번호: 11234222; 11234225

전원 연결 케이블
(최대 길이 10m, 외장 PUR)

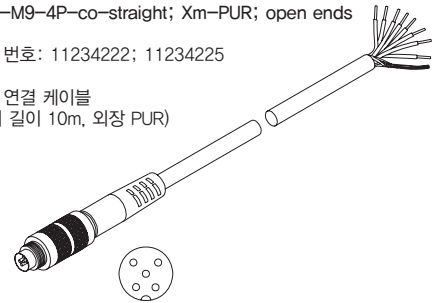

핀	색상	ACS7000
1	흰색	n.c.
2	갈색	+24V DC (±15%)
3	검정색	n.c.
4	파란색	GND (0V)

센서

변위 · 계측센서

머신비전

마킹시스템

광학 · 측정기기

기타

변위 · 계측센서

레이저변위센서

장거리레이저변위센서

2D · 3D 스캐너

마이크로미터

공초점변위센서

분광간섭변위센서

정전용량변위센서

와전류변위센서

마그네틱변위센서

와이어변위센서

접촉식변위센서

디스플레이유닛

데이터처리

온도센서

열화상카메라

컬러센서